

TANKS & INTERCEPTORS

Oil Interceptors

Used for high risk or constant steam areas for full retention of oils



Features


- A coalescent filter
- Class I full retention single stage
- Outlet feeds to surface drain
- Can be fitted with high level alarm



Suitable for 222 m² surface area
1362 ltrs capacity



This product requires frame(s) and cover(s)

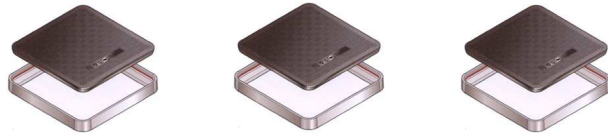

| Model/type | Size mm | Duty | European Standard | Loading | Typical Overground |
|------------|-----------|-------------|-------------------|------------------|-------------------------|
| A15 | 600 x 450 | light duty | BSEN 124 | 3 tonne approx. | cars & small vans |
| B125 | 600 x 450 | medium duty | BSEN 124 | 17 tonne approx. | vans & small commercial |
| D400 | 600 x 450 | heavy duty | BSEN 124 | 38 tonne approx. | large commercial/HGV |

Getting it there...

Specialised equipment, often an awkward shape or size, needs specialist delivery. In order to ensure that critical equipment arrives intact, on time, and unloaded carefully at the right location, we transport equipment to be installed ourselves using our own vehicles.



MORCLEAN



**CALL FREE ON
0800 4584091
to arrange a visit to our
working showroom
& demo area**

Morclean Ltd, Stephenson Road, Speedwell Industrial Estate, Staveley, Chesterfield S43 3JN, UK.
Tel: +44 (0)1246 471147 Fax: +44 (0)1246 471277 sales@morclean.co.uk www.morclean.co.uk
Registered in England No.465133

Morclean reserve the rights to update and amend the specification of any of our equipment & accessories in the interest of the customer. All prices subject to VAT @ SR. (E & O.E)