


# SiltTrap HEAVYWASH

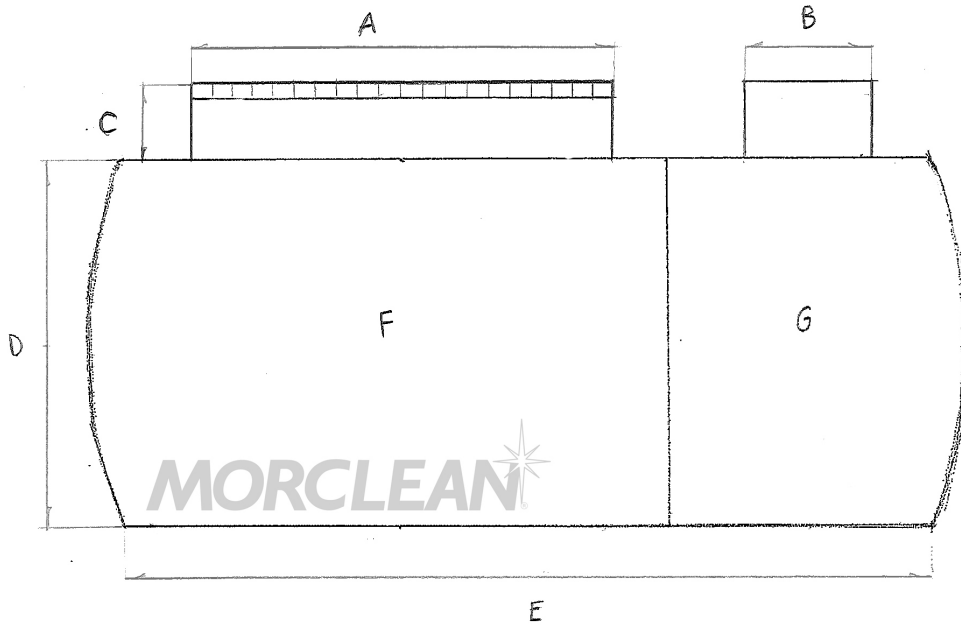

This range of heavy duty high capacity silt traps are designed for heavy wash areas where levels of soils, debris and earth are high.

The HeavyWash range of silt traps are typically used on wash bays for jetting earth moving equipment, quarry vehicles, open-cast or landfill where plant and machinery are covered in mud, clay or other debris.

The large 2M x 1M galvanised hinged grid provides a large surface area for debris to fall to the chamber, and allows access for emptying the sludge. Available up to 20Cm<sup>3</sup> capacity the sludge trap contains silt prior to the interceptor and contains more than the average amount of debris contained in a standard silt trap. Available from 2,500 to 20,000 litre.

The additional access chamber is designed to be conveniently located under a standard 600mm cover and lid (not included),

## Dimensions

A Length of Silt Trap (mm)	2000
B Access Turret to Chamber (mm)	600
C Height of Silt Trap (mm)	500
D Intereceptor Circumference (mm)	Capacity Dependant
E Length (mm)	
F First Stage Chamber	
G Second Stage Chamber	

**CALL NOW,  
FREE ON 0800 1300 402**  
for more information.

